

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau




(43) International Publication Date
13 January 2005 (13.01.2005)

PCT

(10) International Publication Number
WO 2005/003816 A2

- (51) International Patent Classification⁷: **G01T 3/08**
- (21) International Application Number:
PCT/GB2004/002805
- (22) International Filing Date: 29 June 2004 (29.06.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
0315313.7 1 July 2003 (01.07.2003) GB
03254173.2 1 July 2003 (01.07.2003) EP
- (71) Applicant (for all designated States except US): **BAE SYSTEMS plc** [GB/GB]; 6 Carlton Gardens, London SW1Y 5AD (GB).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **KING, Douglas, Beverley, Stevenson** [GB/GB]; Bae Systems plc Warton Aerodrome, Warton, Preston, Lancashire PR4 1AX (GB).
- (74) Agents: **MACLEAN, Martin, David et al.**; Bae Systems plc, Group IP Department, Farnborough Aerospace Centre, Lancaster House, P.O Box 87, Farnborough, Hampshire GU14 6YU (GB).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— without international search report and to be republished upon receipt of that report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: A RADIATION DETECTOR

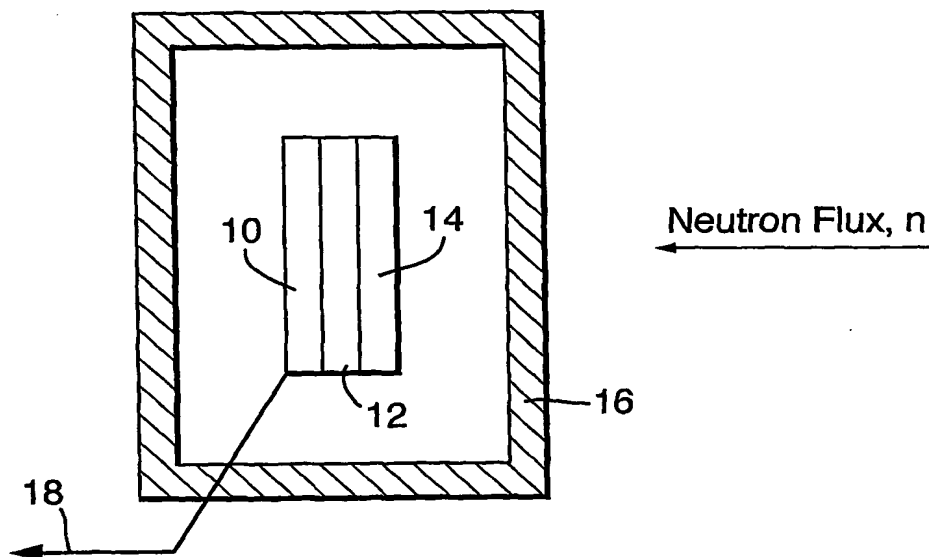

(57) Abstract: The detection of low energy neutrons is improved using a capture material which reacts to incident particles or electromagnetic energy by emitting radiation which is more easily detected by a conventional solid state detection device.

A RADIATION DETECTOR

This invention relates to a radiation detector, and primarily to the detection of low energy neutrons.

5 Neutrons do not carry electrical charge. When they interact with certain elements they produce secondary examples, for instance, protons or alpha particles. The neutron reaction with boron-10 produces an alpha particle, whilst the reaction with helium-3 yields a proton. Such reactions occur when neutrons are incident upon the material with very low energies, i.e. with neutrons having
10 energy levels up to approximately 0.5eV. Thermal neutrons tend to have energies of about 0.025eV, i.e. well within the energy spectrum band just mentioned.

There are a number of different classes of thermal neutron detector. One class comprises boron trifluoride proportional counters. Such a counter
15 comprises a Geiger tube filled with boron trifluoride gas enriched with boron-10. Neutron radiation is detected by detecting the resulting charged particles, i.e. the alpha particles.

Another class consists of helium-3 proportional counters. Such a counter makes use of a tube filled with helium-3 gas. In a manner similar to that
20 described for the boron trifluoride counter, the protons resulting from incident thermal neutron radiation cause electrical conduction which is detected by an electrical circuit.

As a third class, there are so-called "bubble" detectors. Such a detector has a gel material in which are suspended very small drops of liquid. Incident
25 neutrons transfer energy to the liquid drops, causing them to boil and become bubbles. These bubbles, trapped in the gel, are visible to the eye and are easily counted to yield a radiation dose measurement proportional to the number of bubbles formed over a given monitoring period.

It is an object of the present invention to provide an improved radiation
30 detector.

- 2 -

Accordingly, the present invention provides a neutron detector comprising the combination of a solid state device including at least one sensing element having an electrical characteristic which changes in the presence of charged particles or electromagnetic radiation, and a neutron
5 capture material which is associated with the solid state device and which has the property that it emits particles or radiation to which the sensing element or elements of the solid state device are responsive when free neutrons are incident upon it such that the solid state device provides an electrical output indicative of incident free neutrons.

10 Alternatively, a radiation detector for detecting radiation consisting of sub-atomic particles or electromagnetic radiation may comprise: a solid state device with at least one sensing element having an electrical characteristic which changes in the presence of incident particle or electromagnetic radiation of a first kind; and, associated with the solid state device, a capture material
15 which has the property that incident particle or electromagnetic radiation of a second kind causes the material to emit radiation of the first kind, whereby the combination is electrically responsive to radiation of the second kind. Preferably, the capture material is incorporated in a capture layer overlying and in contact with the sensing element or elements of the solid state device. In the
20 case of the solid state device being a CCD or APS, it has a two-dimensional array of sensing elements and the capture layer extends fully over the area of the array. In an alternative embodiment, the semiconductor material of the CCD or APS can be doped with the capture material during manufacture of the device. In this case, the elements of the device may be selectively doped in
25 that they may be doped to differing degrees.

The use of charge coupled devices and active pixel sensor devices as radiation sensors has been disclosed in WO02/077668 for detecting proton and ion fluxes. The present invention makes use of the sensitivity of such devices to charged particle radiation to provide a detector for other kinds of radiation
30 whilst offering the advantages of low voltage operation, low power, low mass and high reliability and sensitivity.

- 3 -

In terms of neutron detection, the invention provides, according to a second aspect, a detector for detecting thermal neutron radiation comprises the combination of a solid state device, for instance a semiconductor device such as a charge coupled device (CCD) or active pixel sensor (APS), which is sensitive to charged particles, and a neutron capture material which has the property that it emits charged particles in response to incident thermal neutrons.

In the case of a detector in accordance with the invention for detecting neutrons, the preferred capture materials are boron compounds containing boron-10 and helium gas containing helium-3. A capture layer may be formed of a boron-10 loaded stable solid compound such as boron-10 enriched sodium borate. Use of helium-3 as the capture material may be achieved by forming a capture layer having a solid matrix containing bubbles of the helium-3 gas.

The thickness of the capture layer may be up to 1mm, typically 0.5mm and thinner.

The concentration of the capture material per unit length of unit area may vary across the area of the sensing elements to yield a sensitivity variation between different parts of the array. Alternatively or in addition, a radiation filter element may be provided, overlying the capture material, the filter element being constructed as a filter layer in which the amount of radiation filtering material per unit length or unit area varies across the layer. Such variation may be achieved by arranging for the layer to have different thicknesses in registry with different parts of the sensing array.

Accordingly, by processing the electrical outputs from different parts of the array, energy spectroscopy can be performed. In the case of neutron detection, the filter material may include a radiation admitting or rejecting material such as cadmium to yield a device for performing low energy neutron spectroscopy. Such a neutron spectrometer has the advantage of low volume compared with conventional neutron spectrometers which use very large polyethylene spheres each having a gas-filled Geiger tube at the centre.

- 4 -

Advantageously, the detector includes a shield positioned over the sensing element or elements substantially to exclude radiation of a kind other than that to be detected.

5 A neutron detector in accordance with the invention may be adapted to detect incident neutrons with energies higher than 0.5eV by applying a neutron moderator material as a filtering layer or shell over the solid state device and the capture material, the moderator shell being formed of a material which reduces the energy of neutrons passing through it. This allows the detection of high energy neutrons such as those present in cosmic radiation.

10 Neutron energy spectrum discrimination can also be achieved by processing the output of the solid state device according, for instance, to pulse amplitude. By counting only pulses having an amplitude greater than the predetermined threshold, the device can be made sensitive substantially exclusively to neutron radiation consisting of neutrons within a predetermined
15 energy spectrum band. This is especially useful for alternating outputs due to high energy neutrons.

The detector can be configured as a personal dosimeter by arranging for the processor to integrate a signal or count derived from the solid state device output over a period of time, the integrated value being indicative of a received
20 dose of radiation.

A particular detector which may be constructed in accordance with the invention is a detector sensitive to X-rays, gamma-rays, and beta-particles. In such a detector, the capture material is one which produces radiation to which the solid state device is sensitive in response to incident X-rays, gamma-rays
25 and beta-particles. A suitable material is zinc sulphide which has the property of fluorescing or scintillating in the presence of such radiation, the emitted photons being detected by the CCD or APS.

A multi-purpose detector may be constructed by having, associated with the solid state device, a radiation capture assembly having different capture
30 materials according to the kinds of radiation to be detected. In particular, the detector may include a plurality of different capture elements each having a

- 5 -

different capture material or the same capture material with different concentrations, the elements being carried in a carrier member which is movable relative to the solid state device such that different capture elements may be brought into juxtaposition with the device at different times to select
5 different detector characteristics.

Similarly, alternative filter elements may be provided on a movable carrier member to select different filter characteristics.

The same technique may be used to select different shield materials according to the radiation to be detected and radiation to be excluded.

10 Of course, it is possible to move the solid state device rather than a carrier member.

Applications of the invention include thermal neutron monitoring outside the biological shield of a nuclear reactor, neutron spectroscopy, personal dosimetry, thermal neutron monitoring close to aircraft fuel tanks (to detect low
15 energy neutron radiation arising from the moderating property of hydrogen in the fuel on high energy cosmic neutrons). The invention also has particular application in the medical field. For instance, neutron radiation arising from neutron capture synovectomy can be monitored. A detector in accordance with the invention for monitoring X-rays has medical applications and applications for
20 monitoring leakage from particle accelerators. The invention also has application in the monitoring of cosmic radiation at high altitude and in space, as well as monitoring fallout from atomic accidents and gamma radiation near nuclear reactors. X-ray spectroscopy is also possible by selection of appropriate filter materials and thicknesses.

25 The invention will now be described by way of example with reference to the drawings in which:-

Figure 1 is a simplified diagram of a detector in accordance with the invention;

Figure 2 is a diagrammatic perspective view of a detector with a
30 sensitivity profile;

- 6 -

Figures 3A and 3B are graphs showing spatial variation of capture material concentration and detector output respectively;

Figures 4A, 4B and 4C are diagrammatic views of alternative graded filter configurations, Figure 4A being a perspective view and Figures 4B and 4C
5 being side views;

Figure 5 is a graph showing the number of pulses emitted by the detector in the presence of incident neutrons of varying energy levels;

Figure 6 is a simplified diagram showing a detector incorporating output signal processing; and

10 Figures 7A, 7B and 7C are diagrams illustrating alternative ways of selecting different radiation capture layers for a multi-purpose detector.

Referring to Figure 1, a detector in accordance with the invention for detecting thermal neutrons N has a solid state device in the form of a CCD or APS sensor 10 with a two-dimensional array of sensing cells. Overlying the
15 sensing cells is a radiation capture layer 12 formed from boron-10 enriched sodium borate. Other boron-10 loaded stable solid compounds may be used. Alternatively the layer 12 may comprise a gaseous layer containing helium-3 gas or a solid matrix containing bubbles of helium-3 gas.

Gas, including the helium-3 gas, may be trapped in a container which
20 includes the sensing array in one of its walls or which encloses the sensing array so that the gas is in contact with the array. The solid matrix may comprise a mass of small gas bubbles containing the gas, the bubbles being pressed together to form a layer on the sensor array. Plastics material may be used instead of glass. In another construction, the solid matrix may be formed
25 as a sponge-like material having sealed voids containing the gas.

The capture layer is preferably of uniform thickness and a few microns (2 to 10 microns) thick.

Placed over the combination of the capture layer and the solid state device 10, i.e. between the capture layer 12 and the expected source of neutron
30 radiation N , is a filter layer 14 which acts as an energy discriminator.

- 7 -

Surrounding the assembly of the solid state device 10, the capture layer 12 and the filter layer 14 is a shield 16 formed of a high atomic mass material, for instance lead, to reduce the influence of non-neutron radiation (primarily gamma radiation). The solid state device 10, formed as an array of sensor cells, has a plurality of electrical output connections which are shown as a single output 18 in Figure 1. Gold or tantalum should not be used owing to their propensity to become radioactive in the presence of neutron radiation. In this preferred detector, the neutron capture material in capture layer 12 is in intimate contact with the surfaces of the individual cells of the solid state device 10. Incident thermal neutrons N pass through the shield 16 and filter layer 14 to impact on the capture material in the capture layer 12. This causes secondary emission of charged particles (alpha-particles in the case of boron-10 and protons in the case of helium-3) which, owing to the proximity of the capture material to the sensor cells of the solid state device 10, produces an electrical output at the output 18 of the solid state device 10. In the case of the solid state device being a CCD or APS array, the neutron-induced emission of a single proton or alpha-particle is equivalent to tens of thousands of photons (the detection of which is the normal purpose of such devices).

Generally, the electrical output of the solid state device 10 is in the form of pulses which may be processed and counted. Accordingly, the detector as a whole can be configured to act as a solid state proportional radiation counter. Use of a CCD or APS array with a logarithmic response yields a large dynamic range.

With regard to the solid state device 10, gold bonding wires are preferably avoided since gold has the property of capturing neutrons and becoming radioactive, leading to the emission of gamma photons. For similar reasons, it is preferable to avoid use of gold eutectics for die/substrate bonding. Instead, bond wires and packaging should preferably be made of a low atomic number material (excluding boron-10 and helium-3).

The purpose of the filter layer 14 is to perform radiation filtering in the energy spectrum. By incorporating energy discriminating material such as

- 8 -

cadmium in filter layer 14, the passage of neutron radiation to the capture layer 12 can be restricted to neutrons lying within a selected energy band.

Whilst the detector structure of Figure 1 has been described above primarily with reference to a detector for neutron radiation monitoring, the same
5 basic structure may be used for monitoring other kinds of radiation, by substituting alternative materials for the capture layer 12 and, insofar as they are included, for filter layer 14 and shield 16.

The concentration of the radiation capture material in the capture layer 12 may be graded across the plane of the solid state device to yield a
10 "sensitivity profile". Referring to Figure 2, the capture material concentration may vary in the x-direction, or in the y-direction, or in both x- and y-directions.

The variation of concentration may be uniform or non-uniform in the x- and y-directions. Where the concentration is low, the sensitivity to incident radiation is low; where the concentration of the capture material is high, the
15 sensitivity is high. Referring to Figures 3A and 3B, if the concentration of the capture material in the x- or y-direction varies as shown, then the average pixel response over a long period of time for one particular neutron energy beam varies across the sensor array correspondingly, as shown in Figure 3B, although the waveform does not pass through the intersection of the axes (the
20 0-points) of Figure 3B. As stated above, a non-linear concentration profile may be used. In particular, an alternative profile is a logarithmic one.

It is also possible to provide variable filtering across the area of the solid state device 10 by, for instance, altering the thickness of the filter layer 14, as shown in Figures 4A, 4B and 4C. Referring to Figure 4A, layer 14 may be
25 stepped, i.e. having a first thickness in the z-direction over one portion of the sensor array area and a larger thickness over another portion of the sensor array area. Alternatively, as shown in the side view of Figure 4B, the filter layer 14 may have a wedge-shaped cross section. This produces a graded radiation energy discriminator characteristic across the area of the filter. With reference
30 to Figure 4C, a non-linear graded filter layer profile may be used. In each of the examples shown in Figures 4A, 4B and 4C, the variation in thickness occurs in

- 9 -

the y-direction. However, the thickness may vary in the x-direction, or in both the x-direction and the y-direction.

The resulting variation in energy discrimination across the area of the sensor array permits low energy neutron spectroscopy to be performed by
5 processing the output signals from different parts of the sensor array and performing comparisons.

Processing of the output 18 from the solid state device 10 can also be used to distinguish between neutron radiation at high energy levels and low energy levels. Figure 5 is a graph showing how the number of pulses obtained
10 at the output 18 of the solid state device 10 (Figure 1) varies with pulse amplitude or height when the detector of Figure 1, in the absence of special energy discriminating filters, is exposed to a typical neutron radiation spectrum. It will be understood that Figure 5 is, effectively, a statistical plot obtained over a period of time. Generally, low energy neutrons ("thermal" or "slow" neutrons)
15 yield a large amplitude, i.e. "bright" pixel responses from the sensor array, whereas high energy neutrons, i.e. "fast neutrons" (as well as gamma photons), tend to yield low amplitude pulses (i.e. "grey or dark" pixel responses). It follows, therefore, that if the output 18 from the sensor array is processed to select, for instance, for further processing only output pulses having an
20 amplitude above a given threshold H_{th} , discrimination against "fast" neutrons is enhanced.

As shown diagrammatically in Figure 6, the processor may comprise a pulse amplifier 20 the output of which feeds a comparison stage 22 in which the height of the received pulses is compared with an amplitude or height threshold
25 H_{th} . The output of the comparator 22 accordingly delivers only pulses corresponding to slow neutron radiation, and is passed to an output line 24 for further processing, counting or other analysis steps.

The processor may include an integration stage 26 for integrating the selected pulse output 24 over a period of time to provide a "radiation dose"
30 output on output line 28, as shown in Figure 6. The integration stage 26 may, of course, be connected to integrate all received pulses rather than those selected

- 10 -

by the comparison stage 22. It will be appreciated that the processor blocks shown in Figure 6 may be embodied, at least in part as functions, in software.

In general, both the assembly of the solid state device 10, the capture layer 12, the filter layer 14 and the shield 16 (as shown in Figure 1), as well as
5 the processor described above with reference to Figure 6, may be incorporated in a compact battery-powered package which is easily portable. Indeed, such apparatus may be embodied for general thermal neutron radiation monitoring and measurement, as a compact neutron spectrometer, or as a readily portable personal dosimeter.

10 We have referred above to the way in which the sensitivity of the detector described with reference to Figure 1 can be adjusted by adjusting the concentration of the capture material in the capture layer 12. Referring to Figures 7A and 7B, a variable sensitivity detector can be constructed by providing a number of radiation capture layer segments 12A, 12B, 12C on a
15 capture layer carrier member 30, the solid state device 10 and the carrier member 30 being movable relative to each other. Each radiation capture layer segments 12A, 12B, 12C has a different capture material concentration so that, as illustrated in Figure 7A, by sliding the carrier member 30 to bring a selected capture layer segment 12A, 12B, 12C into juxtaposition with the sensor array of
20 the solid state device 10, a required detector sensitivity can be selected.

The embodiment shown in Figure 7A is constructed for relative sliding movement of the carrier member 30 and array 10. In an alternative embodiment, shown in Figure 7B, the carrier member 30 and the sensor array 10 are rotatable relative to each other about an axis (not shown) spaced
25 laterally from the array 10. In both cases, movement of the carrier member (or the array) is used to bring the required capture layer segment into overlying registry with the array 10.

In yet a further alternative embodiment, the capture layer segments may be applied to a flexible film or tape mounted on parallel bobbins 32A, 32B on
30 opposite sides of the solid state device 10, whereby rotation of the bobbins 32A, 32B bring the required capture layer segment into registry with the device 10.

- 11 -

The assembly of the bobbins 32A, 32B and film carrier 30, together with capture layer segments 12A, 12B, 12C, may be mounted in a removable cartridge (not shown).

The use of differing capture material segments 12A, 12B, 12C may also
5 be used to adapt the detector to different kinds of radiation. For instance, it is known that a zinc sulphide layer fluoresces or "scintillates" on impact of X-rays, gamma rays and beta particles. The emitted light photons can be detected by a solid state device such as the CCD and APS devices mentioned above. Accordingly, one or more of the capture layer segments 12A, 12B, 12C may
10 have a zinc sulphide layer so that the detector can be switched between neutron monitoring and X-ray or gamma-ray monitoring.

In one particular variant, the apparatus could be configured so that two adjacent capture layer segments having different capture materials could be positioned simultaneously over the sensor array, one material being located
15 over one part of the array and the other material over the other part of the array so that one half of the array is optimised for neutron monitoring and the other half for X-ray monitoring, for instance.

Similar carrier member arrangements may be used for bringing different filter materials into registry with the solid state device 10 for selecting different
20 filter characteristics, using, for instance, energy discriminant filter materials as described above.

Yet further, in a similar way, different shielding materials can be deployed according to the kind of radiation to be monitored.

In the case of X-ray monitoring, X-ray spectroscopy can be performed by
25 grading filter materials across the area of the solid state device 10 or using a movable carrier member with segments of differing material concentration or thickness as described above with reference to Figures 7A, 7B and 7C. Additionally, X-ray detection can incorporate pulse amplitude/height discrimination, as described above, in processing the output from the solid state
30 device 10 to select energy ranges.

- 12 -

A further optional feature, particularly applicable to the neutron detector arrangements described above, is a moderator shell for the detector. It is known that polyethylene and other organic materials, owing to their hydrogen content, act as neutron moderators. By interposing a shell of such material
5 between the source of neutron radiation and the assembly of the solid state device 10, the capture layer 12 and the filter layer 14 the detector can be made sensitive to high energy neutrons. This generally means encasing the assembly in a plastics shell. Thus, the moderator material slows down high energy neutrons for capture by the assembly 10, 12, 14. In this way the use of
10 the detector is extended to detection of cosmic radiation, the detector response lying in the energy range above 0.5eV, and typically extends to energy levels in the region of tens of MeV. Also, although traditionally CCD and APS devices are made using silicon semiconductors, if the solid state device 10 were made using gallium arsenide the arrangement would have significantly improved
15 radiation hardness – albeit at somewhat increased cost.

- 13 -

CLAIMS

1. A neutron detector comprising the combination of a solid state device including at least one sensing element having an electrical characteristic which changes in the presence of charged particles or electromagnetic radiation, and a neutron capture material which is associated with the solid state device and which has the property that it emits particles or radiation to which the sensing element or elements of the solid state device are responsive when free neutrons are incident upon it such that the solid state device provides an electrical output indicative of incident free neutrons.
2. A detector according to claim 1, wherein the capture material is incorporated in a capture layer overlying the sensing element or elements of the solid state device.
3. A detector according to claim 2, wherein the capture material is in contact with the sensing element or elements.
4. A detector according to any preceding claim, wherein the solid state device has a plurality of sensing elements arranged in a distributed array.
5. A detector according to claim 4, wherein the solid state device is a charge coupled device (CCD).
6. A detector according to claim 4, wherein the solid state device is an active pixel sensor (APS).
7. A device according to any of claims 1 or 4 to 6, wherein the capture material is a doping material incorporated in the sensing element or elements of the solid state device.
8. A detector according to any of claims 4 to 6, wherein the concentration of the capture material per unit length or unit area varies across the array of sensing elements to yield a sensitivity variation between different parts of the array.

- 14 -

9. A detector according to any preceding claim, including a radiation filter element overlying the said combination, the radiation filter comprising radiation filtering material.
10. A detector according to claim 9, wherein the filter element is
5 constructed as a filter layer in which the amount of the radiation filtering material per unit length or unit area varies across the layer.
11. A detector according to any preceding claim, including a shield positioned over the sensing element or elements so as substantially to exclude radiation of a kind other than the said second kind.
- 10 12. A detector according to any preceding claim for detecting free neutron radiation, wherein the capture material has the property that free neutron radiation incident upon it causes it to emit charged particles and the sensing element or elements are responsive to the emitted charged particles.
- 15 13. A device according to claim 12, wherein the capture material includes boron-10.
14. A detector according to claim 13, including a capture element in the form of a layer of a boron-10 enriched borate.
15. A detector according to claim 12, wherein the capture material includes
20 helium-3.
16. A detector according to claim 15, including a capture element in the form of a layer of a solid matrix containing bubbles of helium-3 gas.
17. A detector according to any of claims 12 to 16 which is sensitive to incident free neutrons with energies in the region of 0.025eV but
25 substantially insensitive to incident free neutrons with energies above 0.5eV.
18. A detector according to any of claims 12 to 17, wherein the solid state device has a distributed array of sensing cells and, overlying the sensing cells and the capture material, a filter layer made of a neutron
30 energy discriminating material selected to admit through the filter layer

- 15 -

only neutrons having various energies, the thickness of the layer varying across the array of sensing cells to yield an energy spectrum sensitive profile for the detector.

- 5 19. A detector according to any of claims 12 to 16, including a neutron moderator layer over the solid state device and the capture material, the moderator layer being formed of a material which reduces the energy of free neutrons passing through the layer, whereby the detector is sensitive to incident free neutrons with energies higher than 0.5eV.
- 10 20. A detector according to any preceding claim, including a discriminator coupled to an output of the solid state device, the discriminator selecting only electrical signals received from the output with an amplitude greater than a predetermined value.
- 15 21. A detector according to any preceding claim, including means for integrating an output of the solid state device over time to produce a radiation dose reading.
- 20 22. A detector according to any preceding claim, including a plurality of different capture elements including a capture material or materials, and a capture element carrier member carrying the capture elements, wherein the carrier member and the solid state device are positioned with respect to each other and moveable relative to each other such that different capture elements may be brought into juxtaposition with the sensing element or elements of the solid state device for the purpose of selecting different detector characteristics.
- 25 23. A detector according to any preceding claim, including a plurality of different filter elements and a filter carrier member carrying the filter elements, wherein the filter carrier member and the solid state device are movable relative to each other such that different filter elements may be brought into juxtaposition with the sensing element or elements of the solid device for the purpose of selecting different filter characteristics.
- 30

- 16 -

24. A detector according to any preceding claim, including a plurality of different shield members having different shielding characteristics which are selectively locatable to shield the capture material thereby substantially to exclude different kinds of unwanted radiation according to which shield member is selected.
25. A detector according to any of claims 1 to 11 or 20 to 24, wherein the capture material has the property that x-rays incident upon it to cause it to emit radiation to which the sensing element or elements are sensitive.
26. A detector according to claim 25, wherein the capture material has the property of emitting photons when x-rays are incident upon it.
27. A detector according to claim 26, wherein the capture material includes zinc sulphide.

Fig.1.

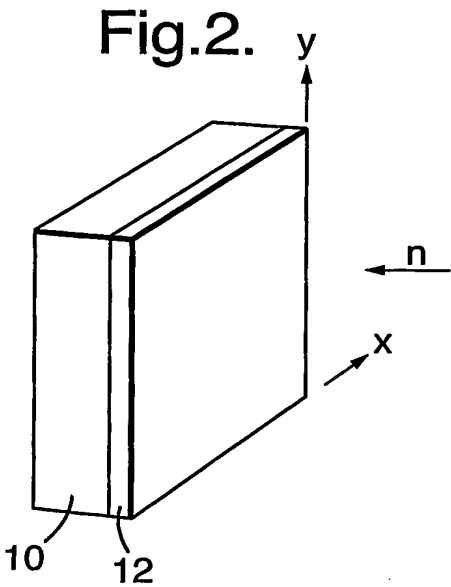
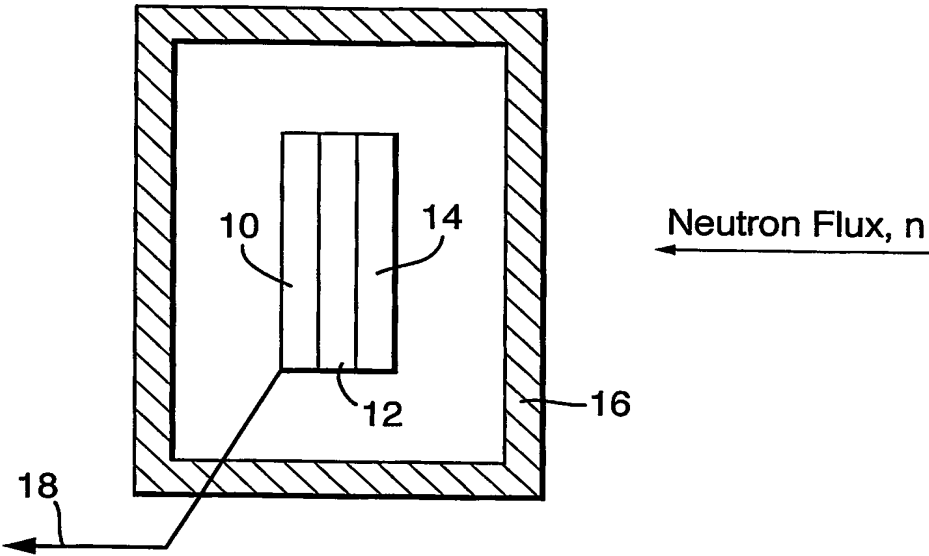


Fig.3A.

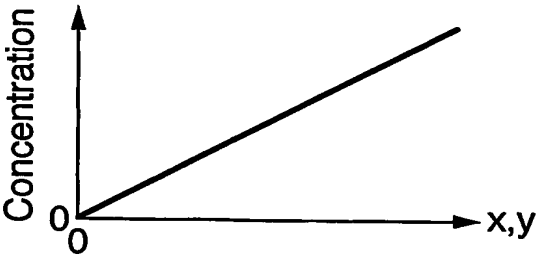


Fig.3B.

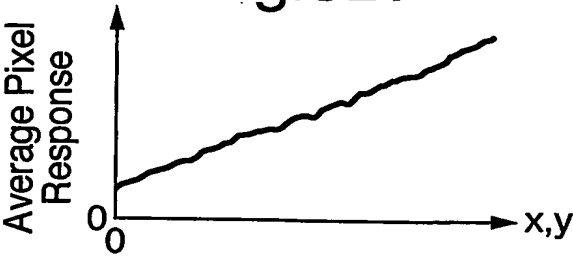


Fig.4A.

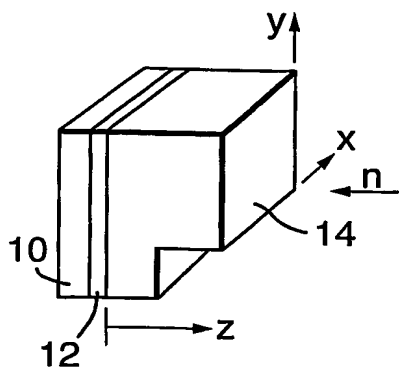


Fig.4B.




Fig.4C.




Fig.5.


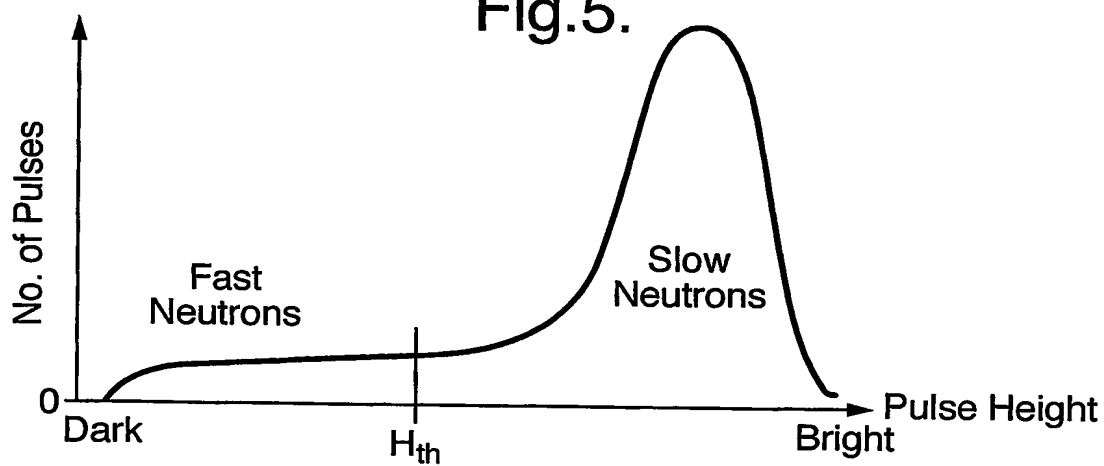


Fig.6.

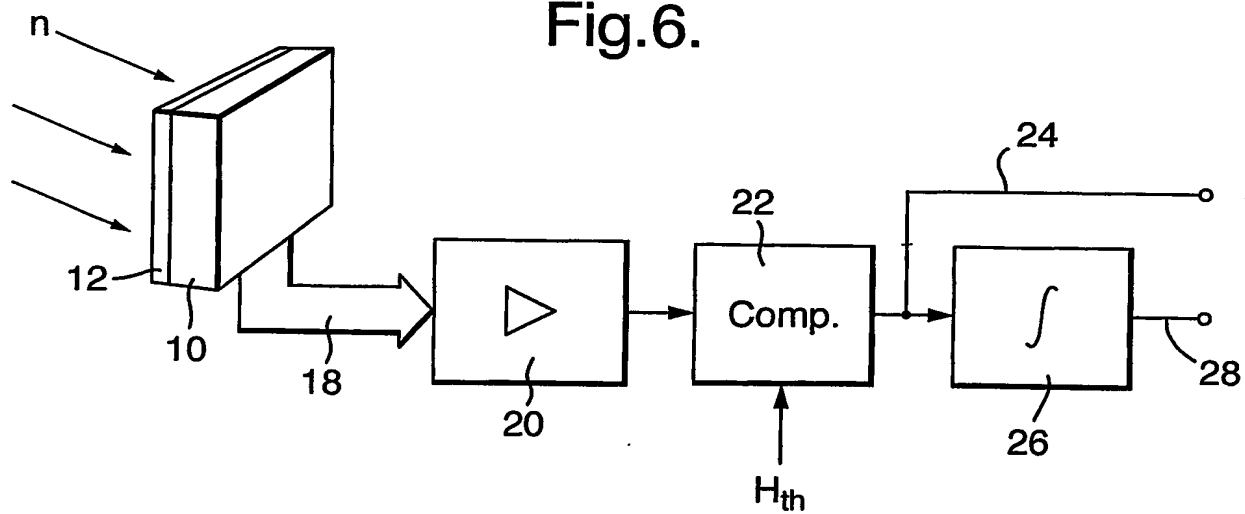

3/3

Fig.7A.

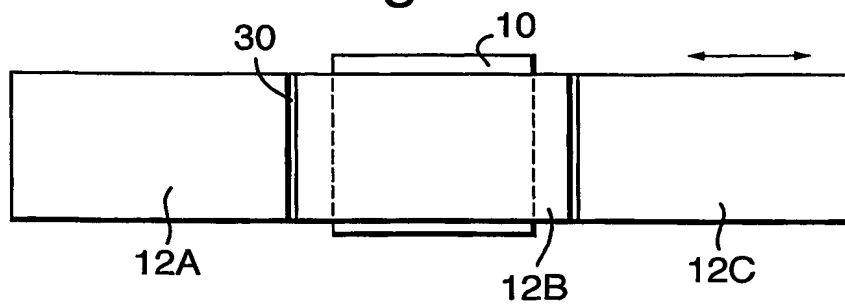


Fig.7B.


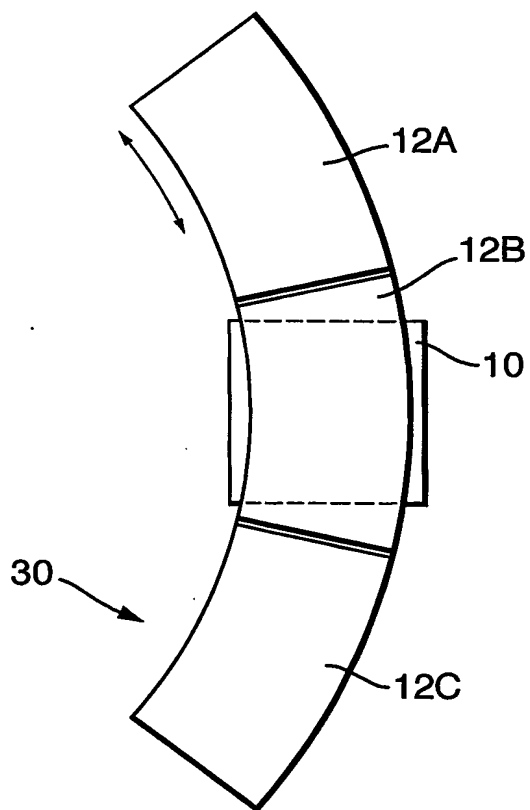


Fig.7C.



(19) World Intellectual Property
Organization
International Bureau

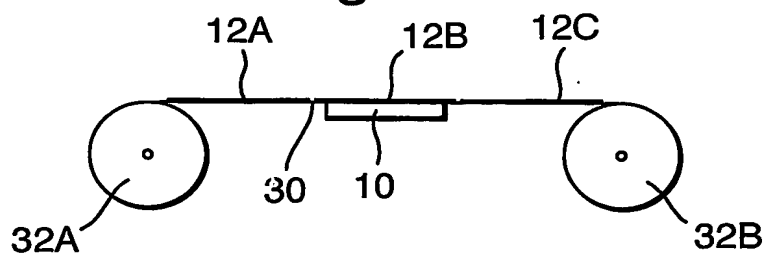

(43) International Publication Date
13 January 2005 (13.01.2005)

PCT

(10) International Publication Number
WO 2005/003816 A3

(51) International Patent Classification⁷: **G01T 3/08**

(21) International Application Number:
PCT/GB2004/002805

(22) International Filing Date: 29 June 2004 (29.06.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0315313.7 1 July 2003 (01.07.2003) GB
03254173.2 1 July 2003 (01.07.2003) EP

(71) Applicant (for all designated States except US): **BAE SYSTEMS plc** [GB/GB]; 6 Carlton Gardens, London SW1Y 5AD (GB).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **KING, Douglas, Beverley, Stevenson** [GB/GB]; Bae Systems plc Warton Aerodrome, Warton, Preston, Lancashire PR4 1AX (GB).

(74) Agents: **MACLEAN, Martin, David et al.**; Bae Systems plc, Group IP Department, Farnborough Aerospace Centre, Lancaster House, P.O Box 87, Farnborough, Hampshire GU14 6YU (GB).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


Published:

— with international search report

(88) Date of publication of the international search report:
24 March 2005

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: A SOLID STATE NEUTRON DETECTOR

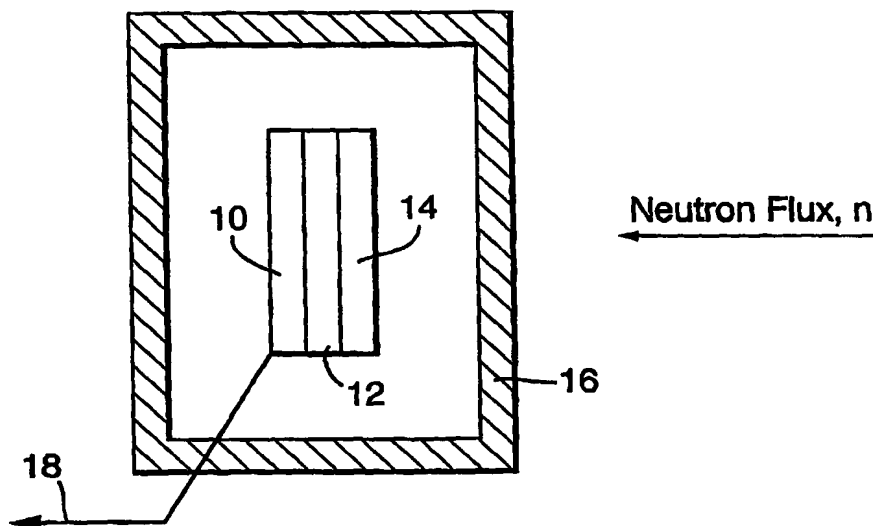

(57) Abstract: The detection of low energy neutrons is improved using a capture material (12) which reacts to incident particles or electromagnetic energy by emitting radiation which is more easily detected by a conventional solid state detection device (10).

INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB2004/002805

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 G01T3/08

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G01T

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, INSPEC, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X A	US 5 399 863 A (CARRON NEAL J ET AL) 21 March 1995 (1995-03-21) abstract column 2, line 56 - column 3, line 37 column 5, line 14 - line 62 figures	1-7, 11-13 14
X	US 5 940 460 A (RUDDY FRANK H ET AL) 17 August 1999 (1999-08-17) abstract column 3, line 8 - column 5, line 8 column 5, line 46 - line 58 column 7, line 33 - line 52 figures	1,2,4,6, 12,13

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- "&" document member of the same patent family

Date of the actual completion of the international search

8 November 2004

Date of mailing of the international search report

04.01.2005

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Datta, S

INTERNATIONAL SEARCH REPORT

International application No.
PCT/GB2004/002805

Box II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. ☐ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☒ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

1-8, 11-14

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☐ No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT

International Application No. PCT/ GB2004/ 002805

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. claims: 1-8, 11-14

A neutron detector comprising a neutron capture material, which emits particles or radiation following neutron irradiation, and the sensing elements of a solid state device; the device provides an electrical output.

1.1. claims: 12-14

The neutron capture material emits charged particles when irradiated with neutrons.

2. claims: 9,10

A radiation filter overlying the neutron detector which excludes all unwanted neutron radiation.

3. claims: 15, 16

A neutron capture material consisting of a solid matrix with bubbles of helium-3 gas.

4. claim: 17

A neutron detector with energy sensitivity in the region 0.025eV to 0.5eV.

5. claim: 18

A single filter layer having variable thickness overlying the sensor array to obtain energy discrimination for low energy neutron spectroscopy.

6. claim: 19

A moderator layer overlying the neutron detector to reduce the energy of incoming high energy neutrons before capture.

7. claim: 20

A discriminator coupled to the output of a neutron detector for amplitude threshold determination.

8. claim: 21

INTERNATIONAL SEARCH REPORT

International Application No. PCT/ GB2004/ 002805

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

An integrator coupled to the output of a neutron detector for dose determination.

9. claim: 22

A plurality of different capture materials on a carriage which is movable in front of a solid state detector so that the sensitivity of the detector to various kinds of neutrons (eg thermal, fast etc) can be increased.

10. claim: 23

A plurality of different filter materials on a carriage which is movable in front of a solid state detector to obtain discrimination of neutrons of different type using a single, small, and versatile device.

11. claim: 24

A plurality of different selectable shielding materials placed in front of the capture material to exclude a variety of unwanted radiation.

12. claims: 25,26,27

A neutron detector wherein the capture material emits photons when irradiated with X-rays.

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB2004/002805

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5399863	A	21-03-1995	NONE	

US 5940460	A	17-08-1999	AU 2556699 A	17-05-1999
			WO 9922251 A2	06-05-1999
